




# BRAIDED SILICONE HOSES

DN	NOM. PRESSURE	MAX. PRESSURE	BRAIDING AISI304L	HOSE DIAMETER
DN8	10 BAR	20 BAR	INOX 8x0,18 mm	8x11 mm
DN10	10 BAR	20 BAR	INOX 8x0,18 mm	9,7x13,2 mm
DN13	10 BAR	18 BAR	INOX 9x0,22 mm	13x17 mm
DN15	10 BAR	16 BAR	INOX 9x0,22 mm	15x19,8 mm
DN20	10 BAR	16 BAR	INOX 12x0,22 mm	19,5x26 mm
DN25	8 BAR	10 BAR	INOX 12x0,22 mm	25x32,5 mm
DN32*	8 BAR	10 BAR	INOX 10x0,25 mm	32x40,5mm
DN40*	6 BAR	10 BAR	INOX 10x0,25 mm	40x52 mm


\* only available with KTW certificate

# CERTIFICATIONS

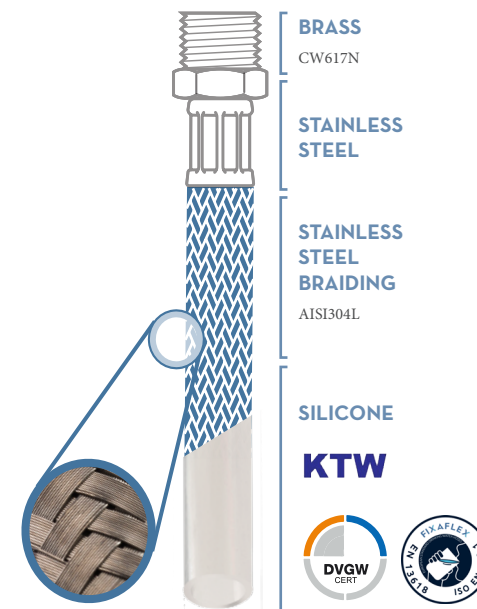

**FIXAFLEX**  
FLEXIBLE HOSE MANUFACTURER

**DRINKING WATER**  
 **SILICONE RUBBER**

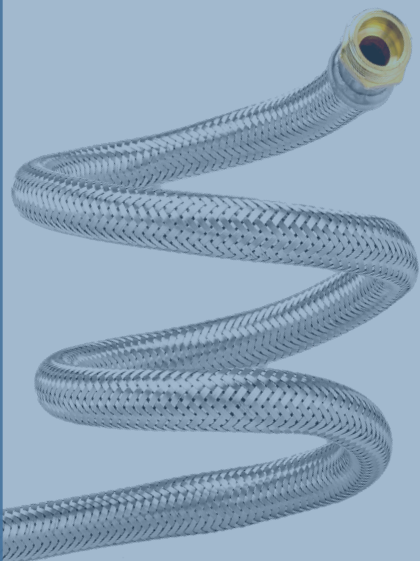


# SLEEVES AND FITTINGS

DN	SLEEVE DIMENSIONS	BORE DIAMETER FITTINGS
DN8	13x14x18 mm	6 mm
DN10	15,5x16,5x20 mm	7 mm
DN13	20x22x24 mm	10,5 mm
DN15	23x24,4x29 mm	12 mm
DN20	30x32x35 mm	15 mm
DN25	36x38x35 mm	19 mm
DN32	45x47x46 mm	25,5 mm
DN40	55x57x42 mm	32 mm

# LENGTH NBN EN 13618

LENGTH OF HOSE	TOLERANCE
$L \leq 400$ mm	- 0 mm / + 10 mm
$400$ mm < $L \leq 1000$ mm	- 0 mm / + 20 mm
$1000$ mm < $L \leq 2000$ mm	- 0 mm / + 30 mm

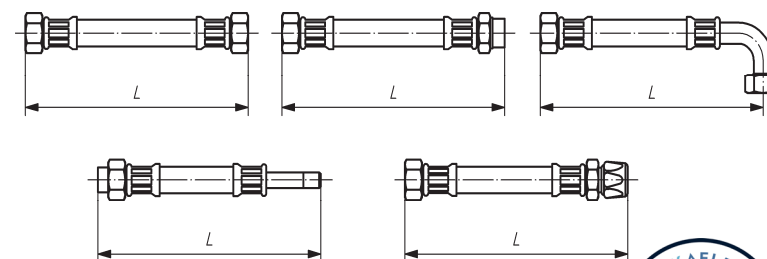

- 50°C  
+ 200°C  
certified temp. may deviate

Our certified hoses are manufactured according to the European EN 13618 standards. And our fittings comply with the European standards EN ISO 228-1.

