




BRAIDED EPDM HOSES

CERTIFICATIONS

FIXAFLEX
FLEXIBLE HOSE MANUFACTURER



PLUMBING

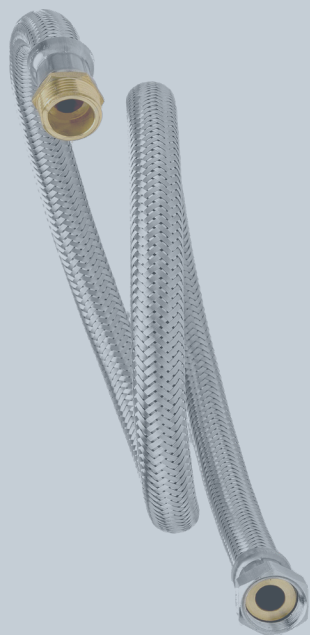


- 30°C
+ 90°C
+ 110°C

certified temp. may deviate

DN		NOM. PRESSURE	MAX. PRESSURE	BRAIDING AISI304L	HOSE DIAMETER
DN6	*	10 BAR	20 BAR	INOX 6/7x0,18 mm	6,5x9,5 mm
DN8*		10 BAR	20 BAR	INOX 8x0,18 mm	8x11,2 mm
DN10*		10 BAR	20 BAR	INOX 8x0,18 mm	10x14 mm
DN13*		10 BAR	18 BAR	INOX 9x0,22 mm	13x17 mm
DN15*		10 BAR	16 BAR	INOX 9x0,22 mm	15x19,8 mm
DN20	*	10 BAR	16 BAR	INOX 12x0,22 mm	19,5x26 mm
DN25	*	8 BAR	10 BAR	INOX 12x0,22 mm	25x32 mm
DN32	*	8 BAR	10 BAR	INOX 10x0,25 mm	32x42 mm
DN40	*	6 BAR	10 BAR	INOX 10x0,25 mm	40x52 mm
DN50	*	6 BAR	8 BAR	INOX 10x0,25 mm	50x62 mm

* Also available in QB or WRAS certification, But only on demand.

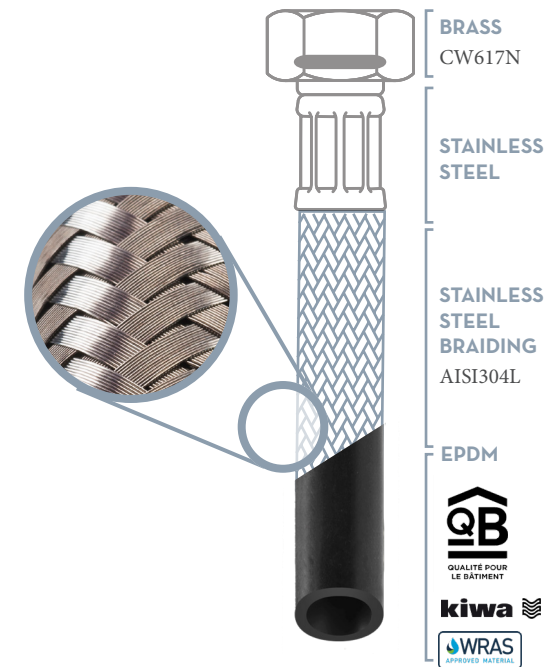


SLEEVES AND FITTINGS

DN	INOX SLEEVE DIMENSIONS	ALU SLEEVE DIMENSIONS	BORE DIAMETER FITTINGS
DN6	12x13x16 mm	-	4,5 mm
DN8	13x14x18 mm	-	6 mm
DN10	15,5x16,5x20 mm	-	7 mm
DN13	20x22x24 mm	20x22x25 mm	10,5 mm
DN15	23x24,4x29 mm	22x24x25 mm	12 mm
DN20	30x32x35 mm	30x32x31 mm	15 mm
DN25	36x38x35 mm	36x38x38 mm	19 mm
DN32	45x47x46 mm	46x49x45 mm	25,5 mm
DN40	55x57x62mm	57x60x51 mm	32 mm
DN50	67,6x70x57 mm	66,7x70x51 mm	41 mm

LENGTH NBN EN 13618

LENGTH OF HOSE	TOLERANCE
L <= 400 mm	- 0 mm / + 10 mm
400 mm < L <= 1000 mm	- 0 mm / + 20 mm
1000 mm < L <= 2000 mm	- 0 mm / + 30 mm

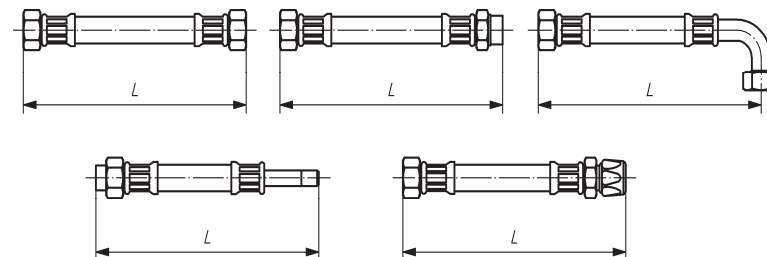

Our certified hoses are manufactured according to the European EN 13618 standards. And our fittings comply with the European standards EN ISO 228-1.

